

STOBIFORM - PU Edge Protection "KW"




STOBIFORM - STOBIFORM - PU Edge Protection "KW" is used to lift extremely sharp-edged loads such as metal coils. They can easily be attached to the corners with magnets (optional). The edge protection can be supplied for lifting sling widths of 65 to 300 mm or

for ropes up to 40 mm in diameter.

The edge protection can also

be installed (as a special version) with a radius on the load side that corresponds with the inner diameter of the metal coil to be lifted. This achieves an extremely even distribution of force.

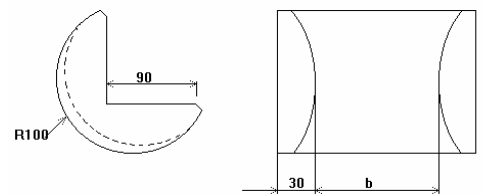

Name	For belt width b up to	Weight per unit without magnet (Kg)	weight per unit with magnet (Kg)	Number of magnets
KW 25	25 mm	0,6	0,7	2
KW 40	40 mm	0,7	0,8	2
KW 65	65 mm	0,8	1,0	2
KW 75	75 mm	0,9	1,2	4
KW 100	100 mm	1,1	1,5	4
KW 125	125 mm	1,3	1,6	4
KW 150	150 mm	1,5	1,9	4
KW 200	200 mm	2,1	2,6	6
KW 300	300 mm	2,8	3,5	8

Other sizes and designs on request

Design with perforated metal bracket as an insert can also be supplied.

All sizes are approximate! Techn. changes reserved.